
















	SPX424CDH	 2030
	Abnehmbares Gewicht	200
	2.5T-D7	20
	PP400-4DX	45
	JIB800GX JIB800.1MX JIB800.1H1 MV600.3E	25 110 140 200


	Inklusive hydraulisch verstellbares Kettenfahrwerk	 2400 kg
	3160 x 780 x 1875 mm	 11,9 m
	3740 x 3740 mm	 15,0 m


	800 kg 73 m - Ø 7 mm 21-42 m/min		
	2400 kg	3	-20 m
	1600 kg	2	-32 m
	800 kg	1	-65 m

	KUBOTA D722E3B
	14,9kW 20Hp
	24 V / 240 Ah 4kW - 3F 400 VAC 50 Hz


 360° / 1,5 U/min

 2,6 m - 8,5 m / 26 sek.

 0°/75° / 14 sek.

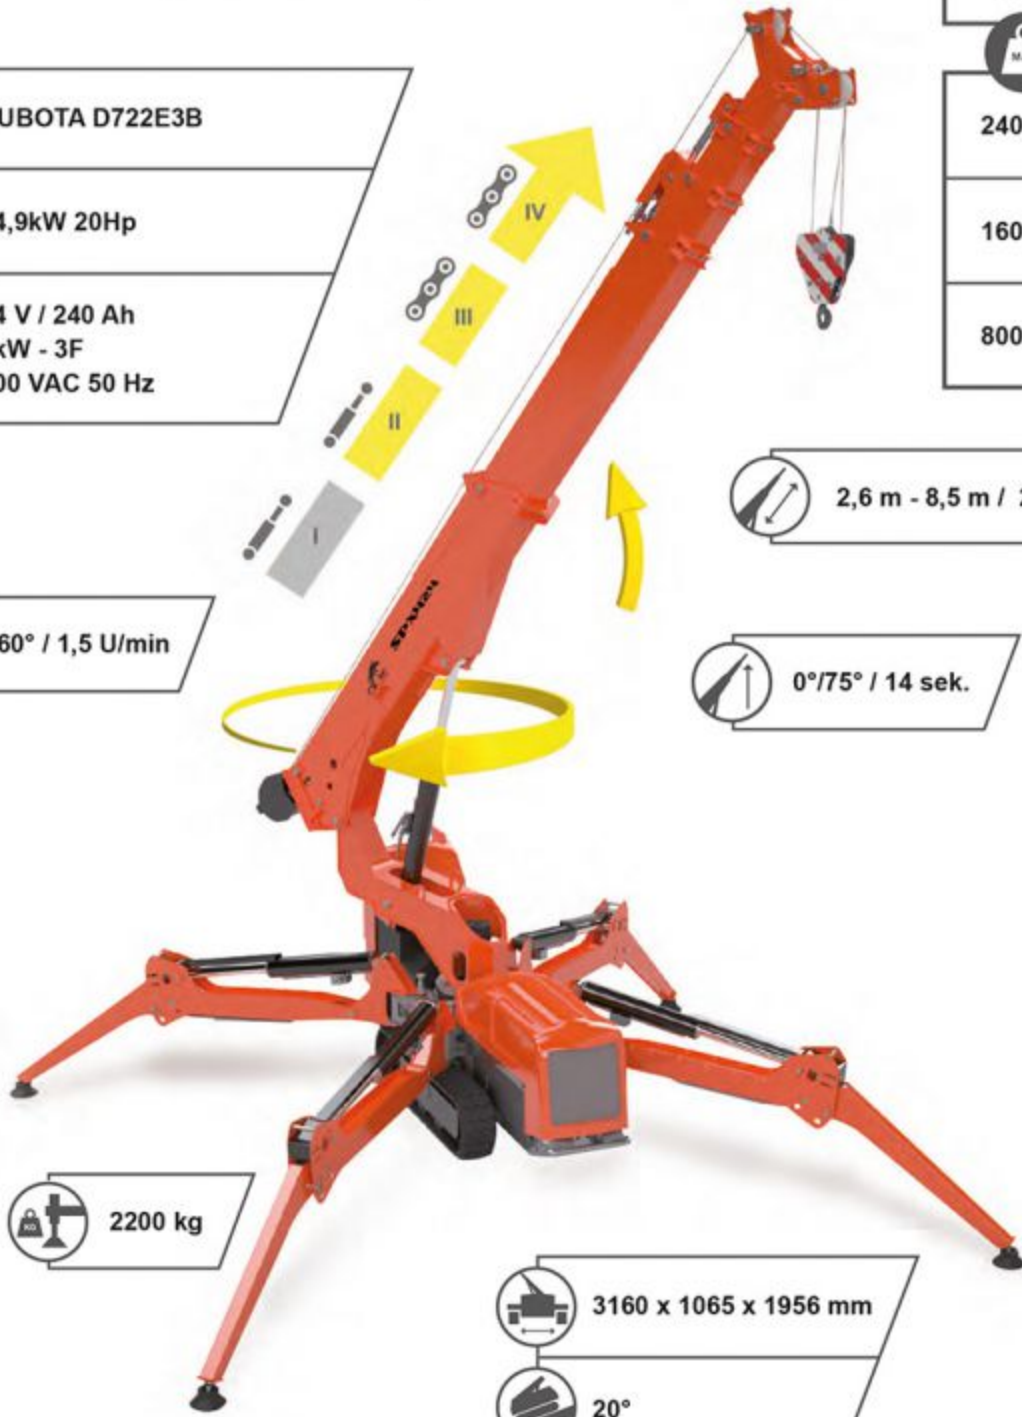


 2200 kg

 3160 x 1065 x 1956 mm

 20°

	0,55 kg/cm ²
	1,8 km/h

Hauptausleger

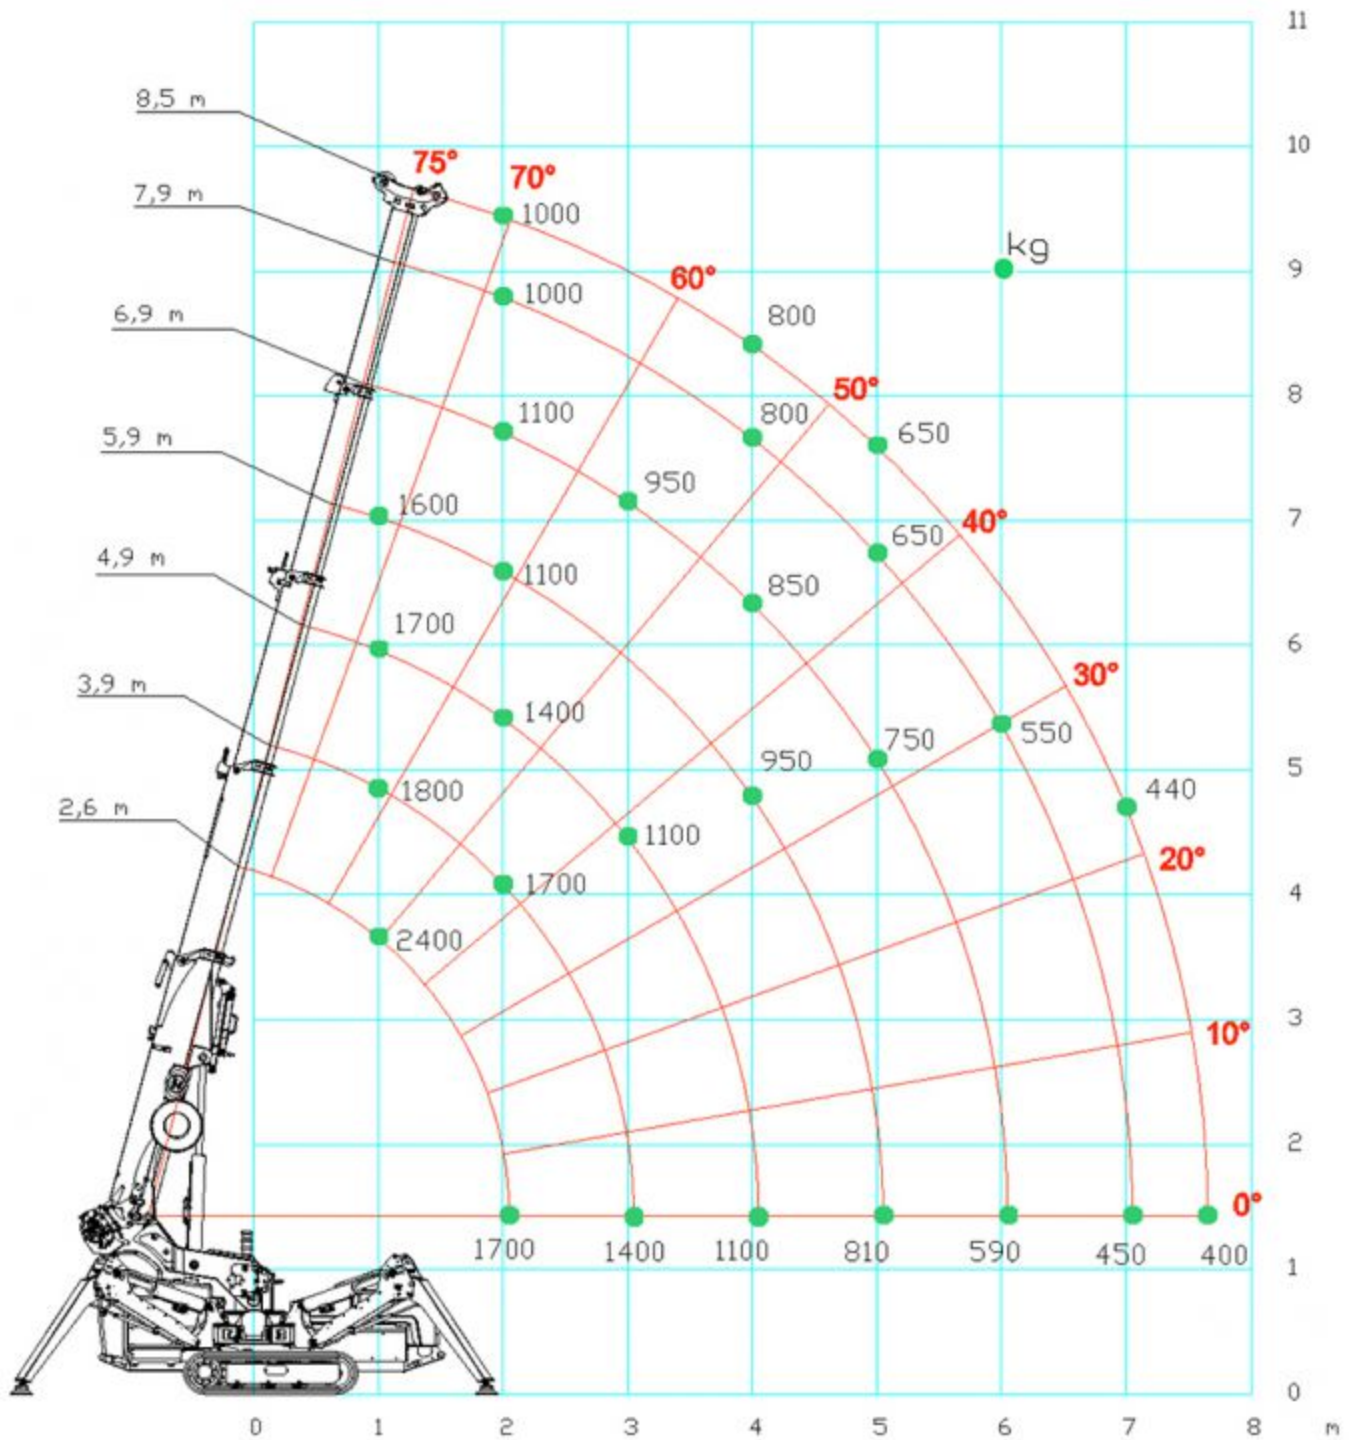

-  100%
-  360°
-  200 kg
-  Winde